



特点与使用范围:


扬程较高，主要用于滴灌、喷灌和微灌等节水工程，也适用于建筑、地下积水的抽送与排水。

Applications

High head pumps, mainly designed for water saving drip and spray irrigation. Also used to transfer and discharge underground standing water in construction sites.



QX

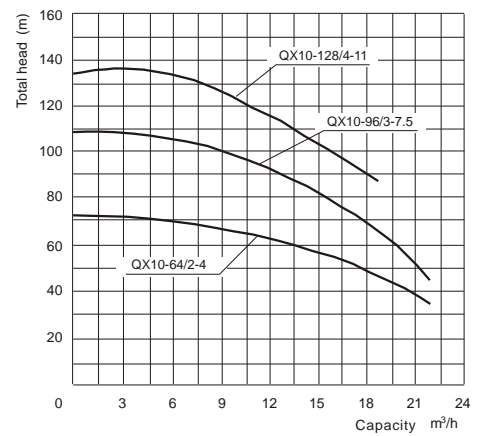

技术参数Specification

型号 Model	电压、频率 Voltage, Frequency	功率 Output Power	扬程 Head (m)	流量 Capacity (m³/h)	配管内径 Discharge Size (mm)	外形尺寸 Size (mm)	重量 N. W.
QX10-64/2-4	380V, 50Hz	4kW	64	10	65	280 × 270 × 690	75kg
QX10-96/3-7.5	380V, 50Hz	7.5kW	96	10	65	280 × 270 × 800	100kg
QX10-128/4-11	380V, 50Hz	11kW	128	10	65	280 × 280 × 1200	140kg

* 其他电源可根据用户要求提供。 Other voltage and frequency are available if required.